
LANBON®

4.3'Digital Video Outdoor phone

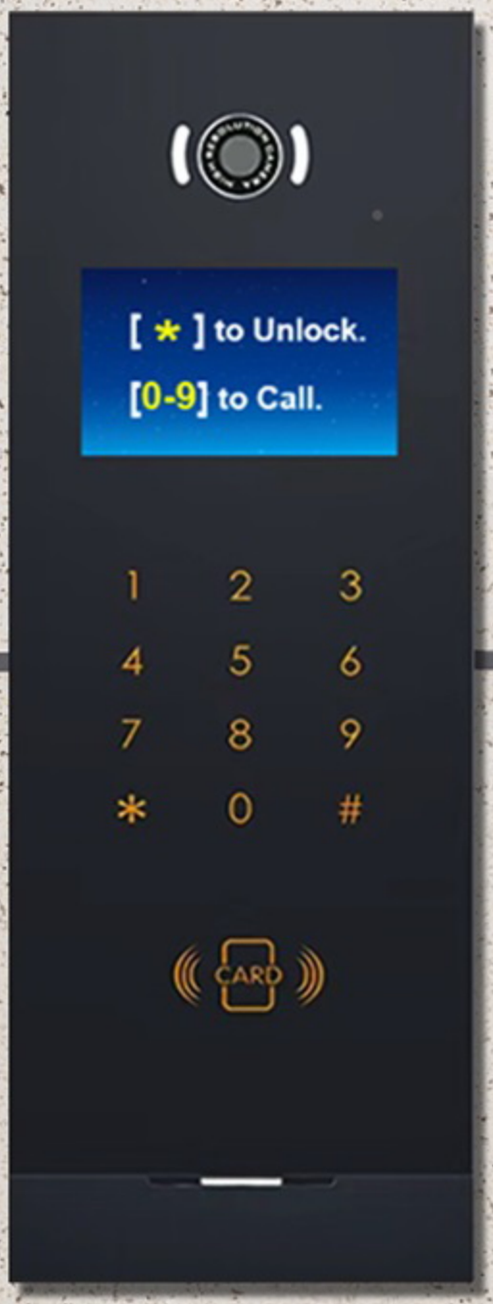

- Support POE and RJ45 interface
- Use SIP protocol
- Support up to 9999 households
- IC card access control and password unlock

Video intercom door phone

Add technology elements to your life



HD digital camera

Night light board

High sensitive waterproof microphone

4.3-inch HD-definition LCD screen

Touch keys with LED

IC access card

Trumpet


HD Camera

1.3MP HD digital camera with night light is still clear even at night



HD Screen

4.3-inch high-definition screen, resolution 800*480,
all operations are clear at a glance, support multiple voices,
and can also customize multiple languages

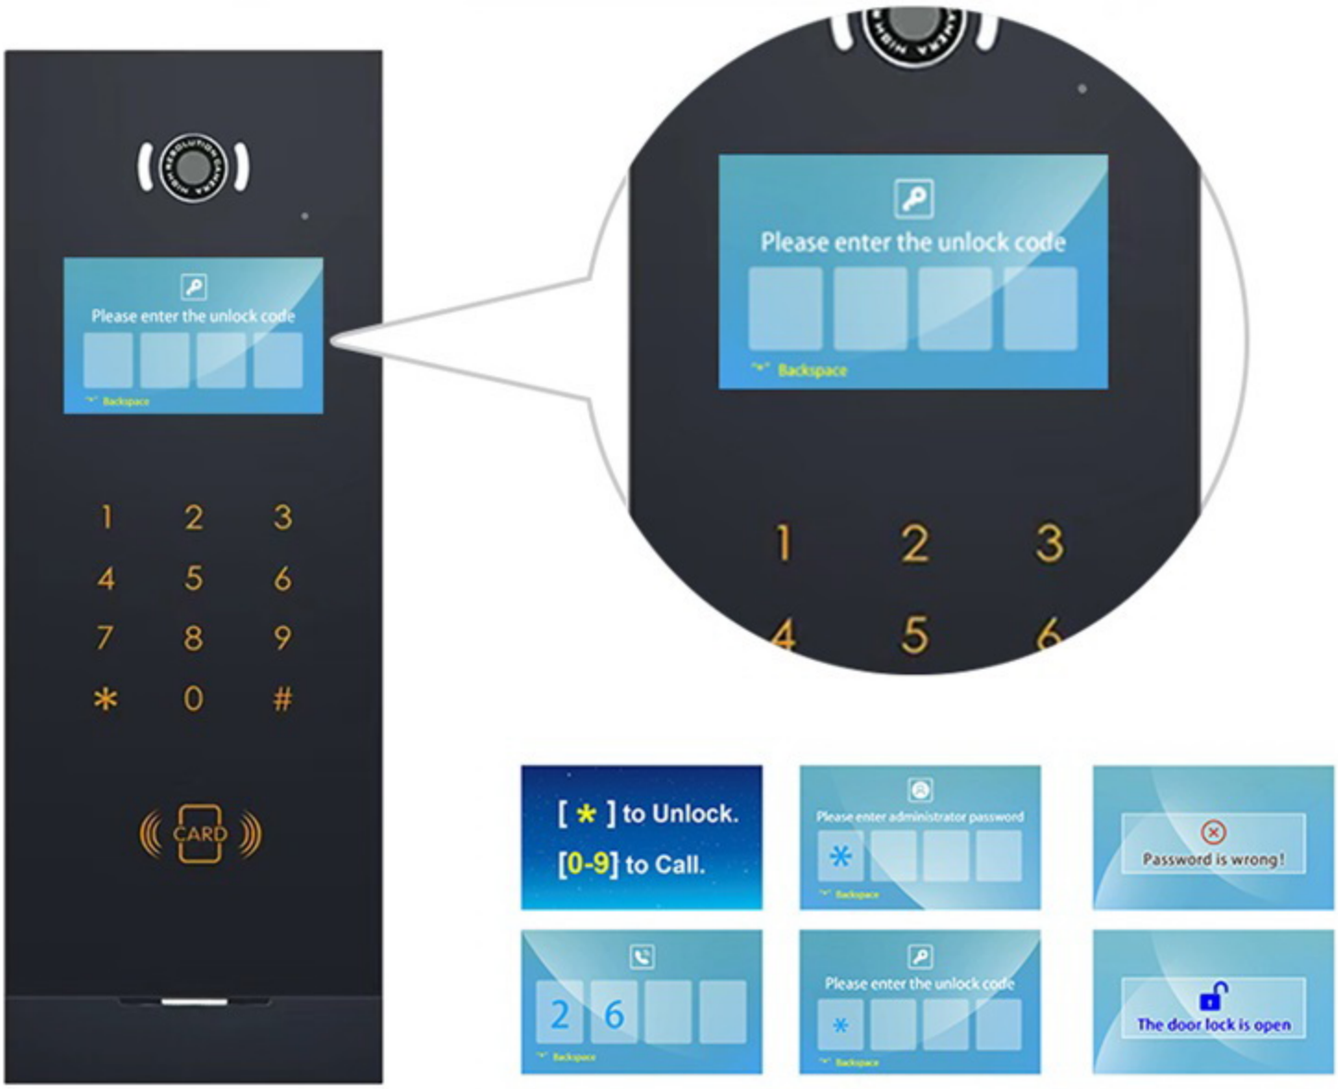

Two-way voice call

Full duplex intercom, noise suppression function and clear intercom sound

Hi I'm here~

Ok,open the door !


IC access card

Support IC access control card, high security and easy to add or delete




Waterproof touch keyboard

Wet hands can also touch, with LED backlight, clearly visible during the day and night, sensitive to touch and work well

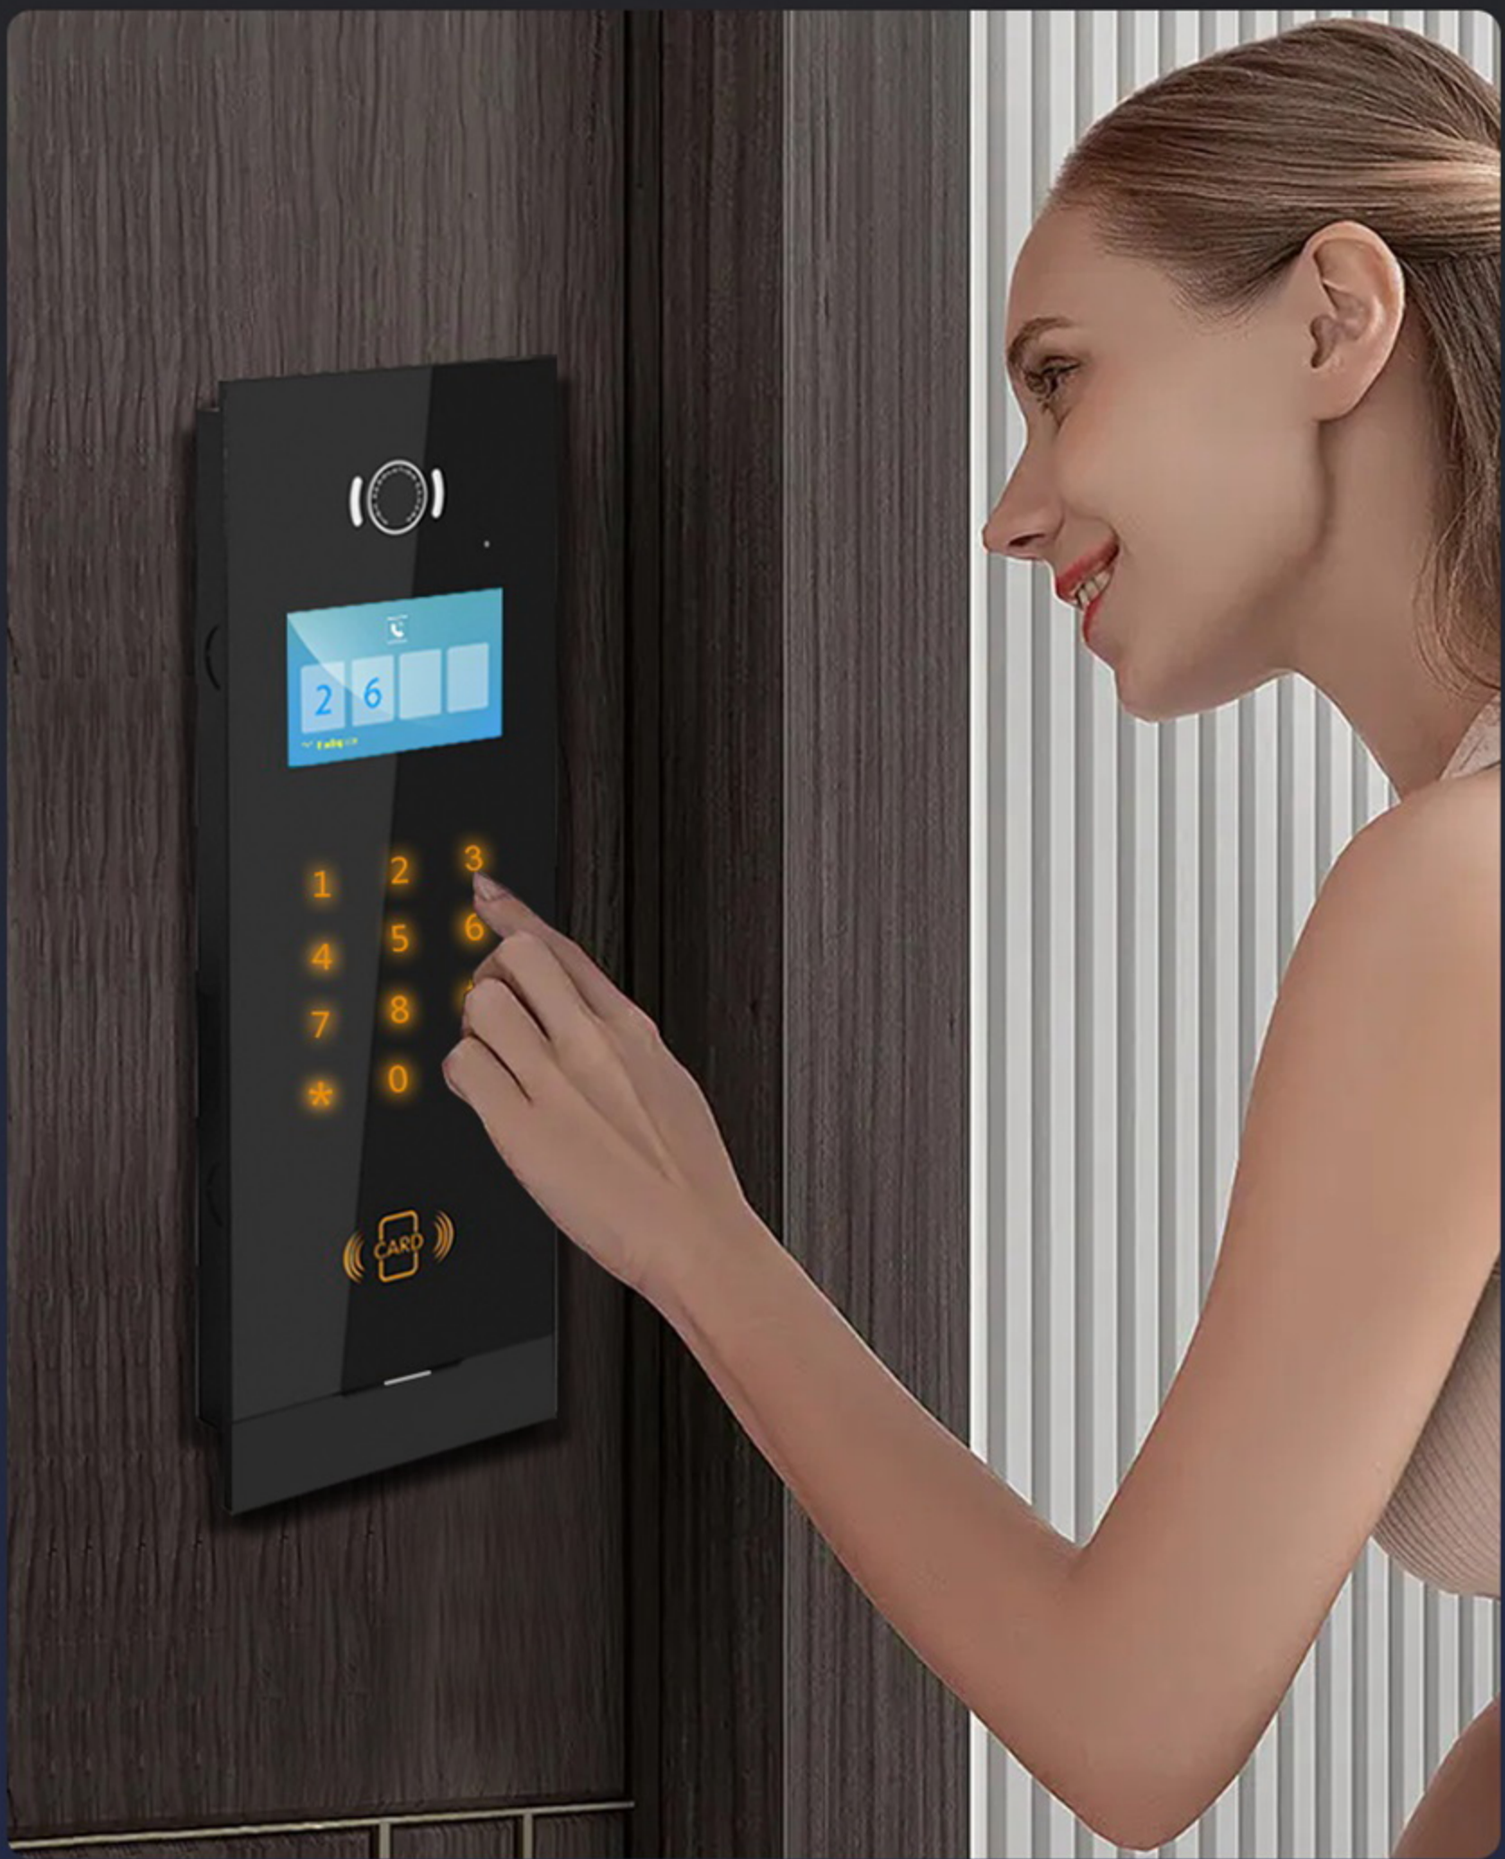


Automatic night light

Automatic night light at night, also clearly visible at night

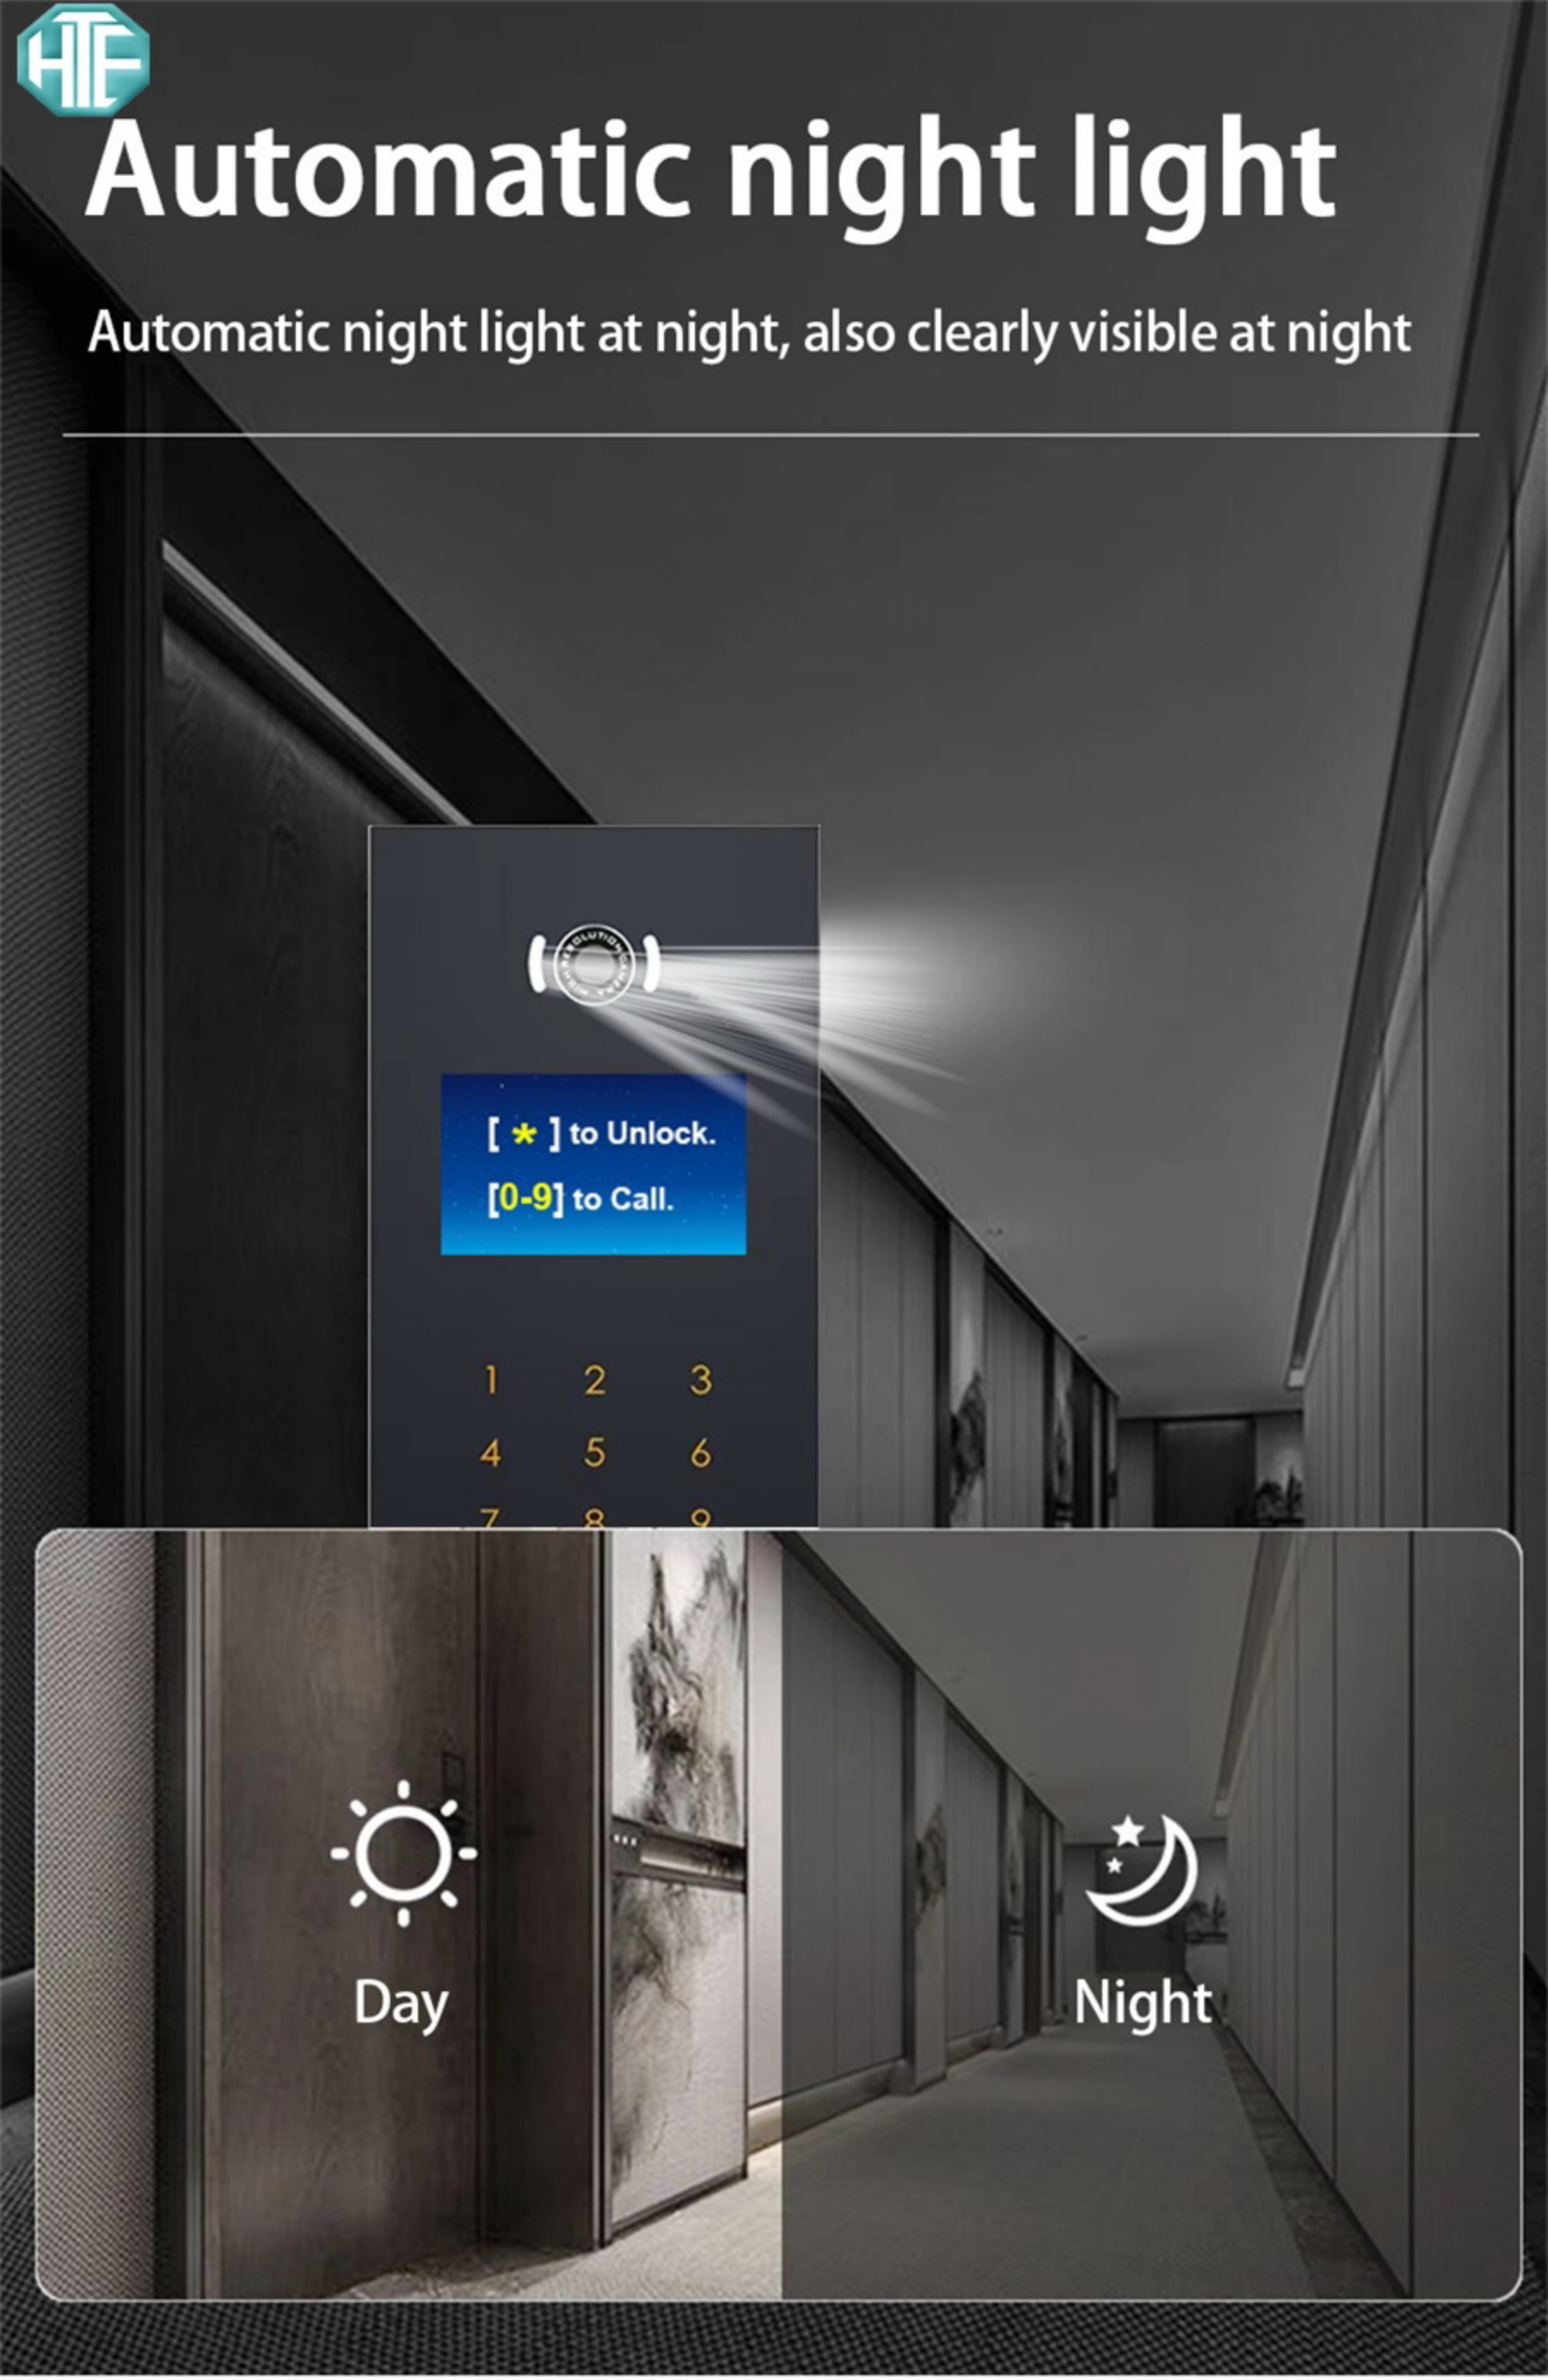


Support various locks

Support electromagnetic lock and electric control lock, can set the unlock time, can use the door machine to power the lock or power the lock separately

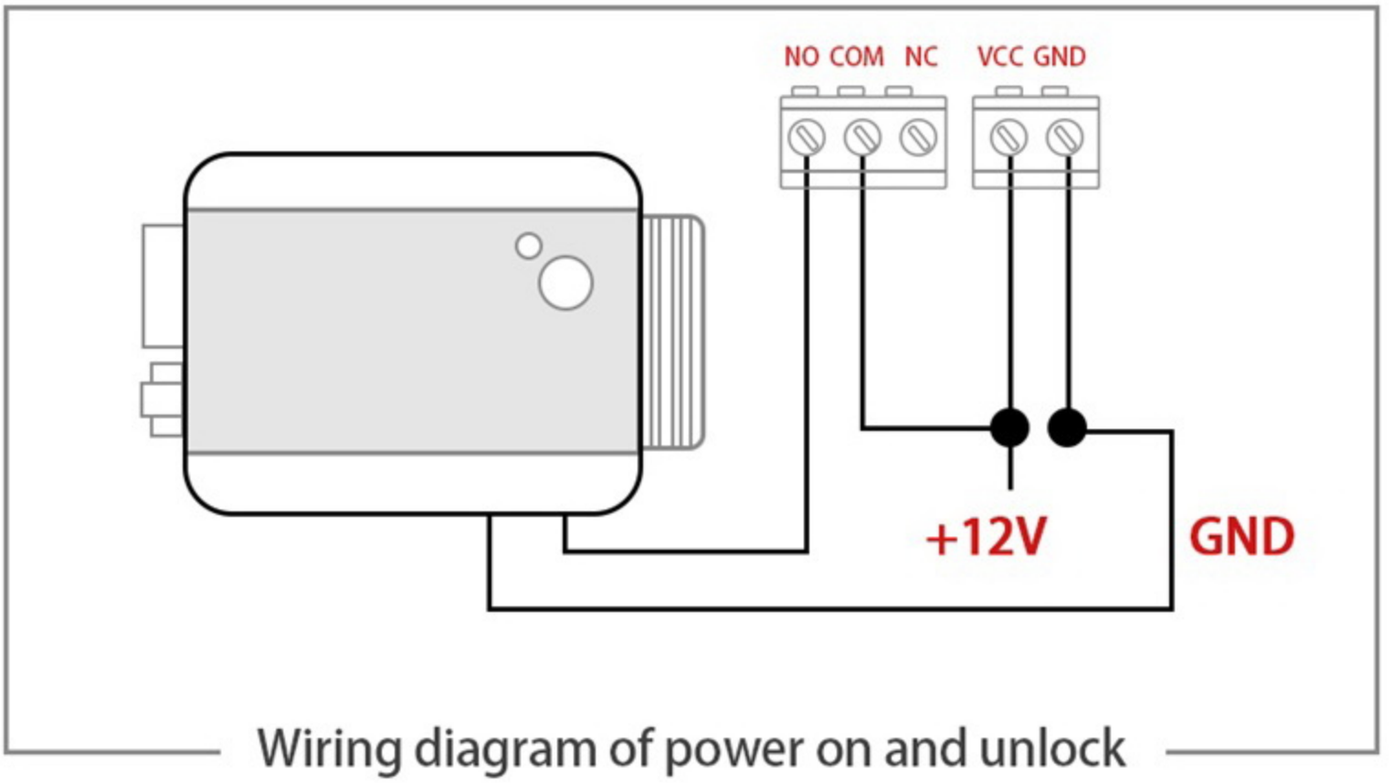

Wiring diagram of power on and unlock

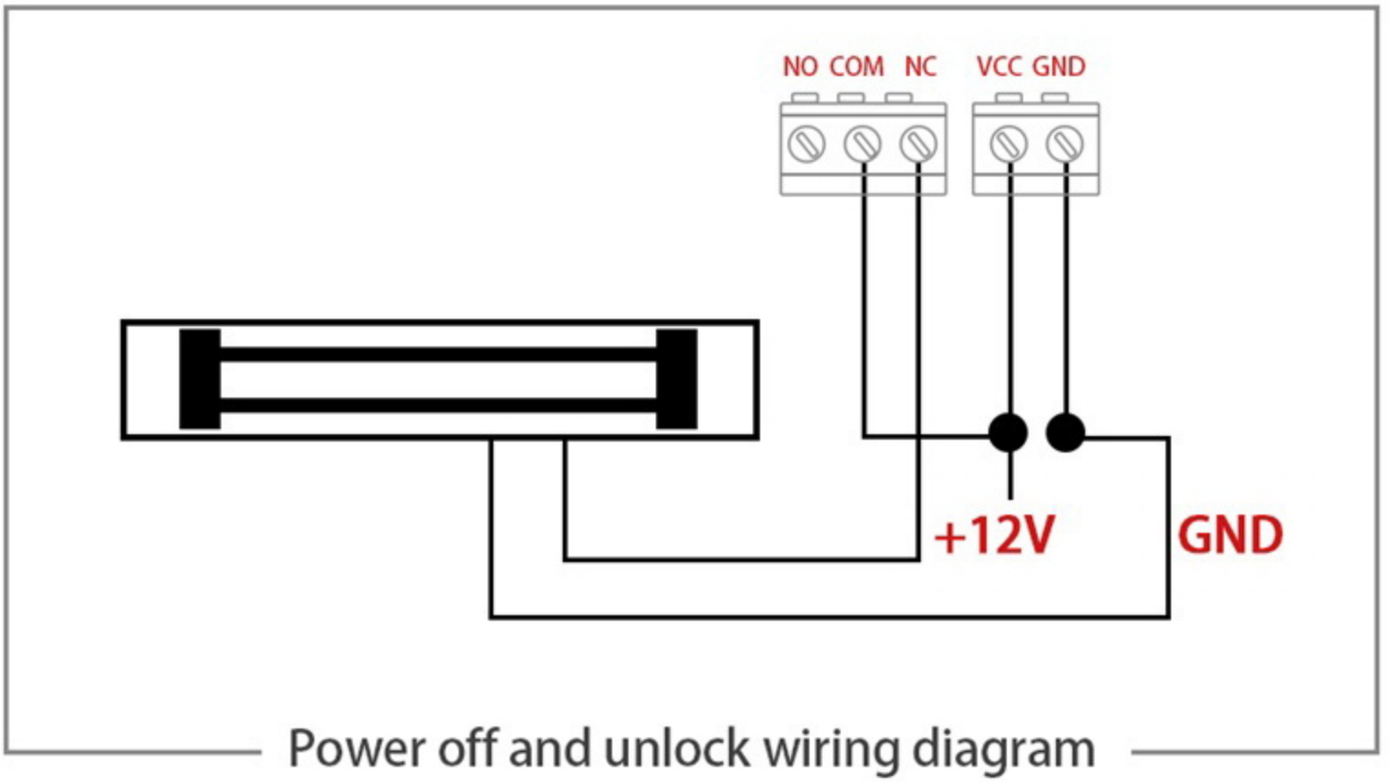

Power off and unlock wiring diagram

Waterproof function

Comes with a zinc alloy material rainproof shell, strong and durable outdoor rain double protection for longer use.



Applicable scene

Can be widely used in residences, schools, hotels, community entrances and exits and other places.















Installation location diagram



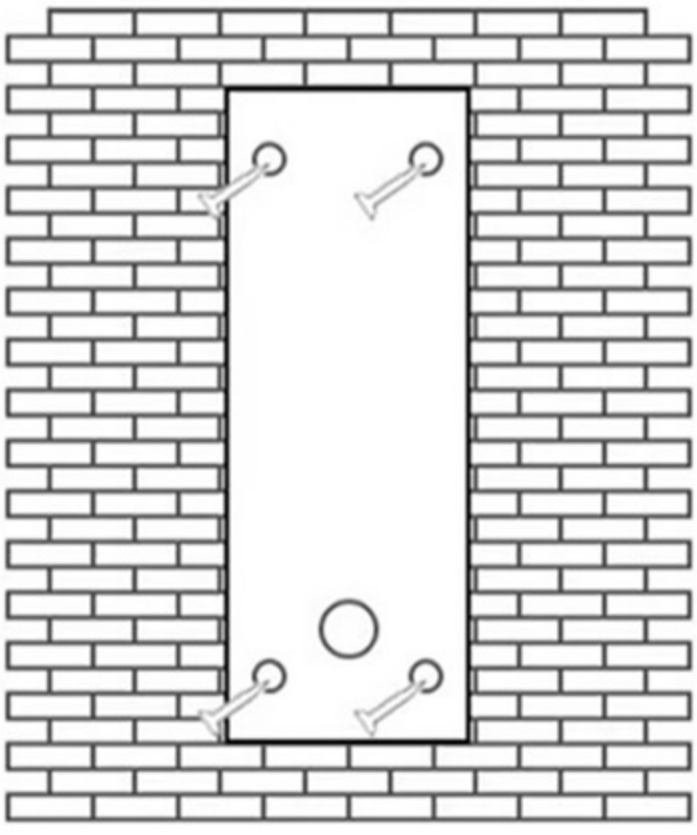

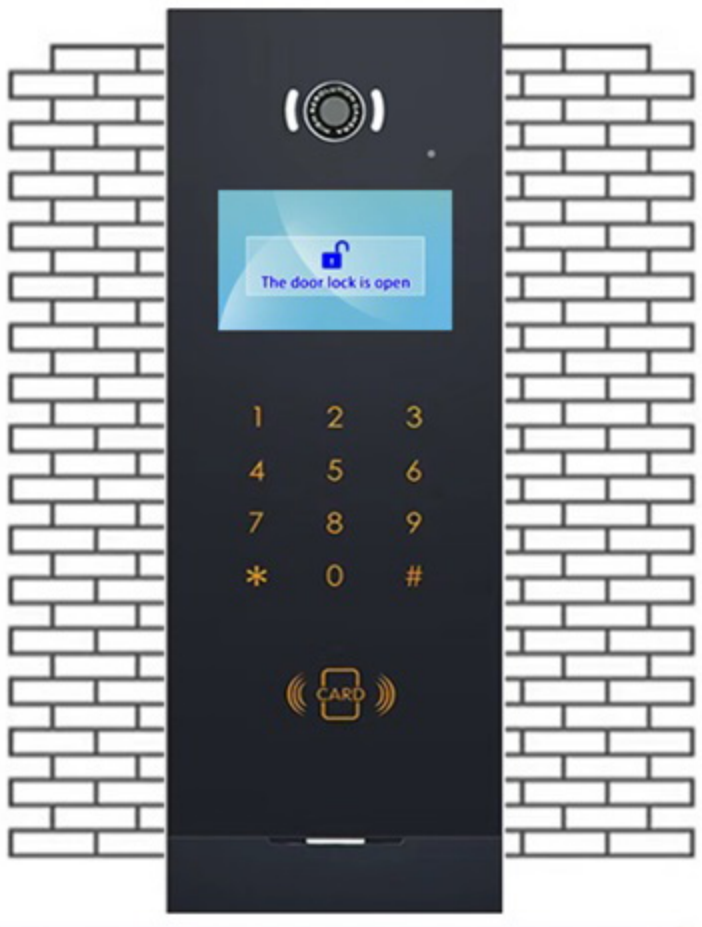

1. Dig a hole in the door or wall according to the bottom box size
2. Fix the bottom box in the hole
3. Connect the host wiring, set the parameters, etc.
4. Fix the host on the installation box with screws, so that the host is close to the anti-theft door or wall
5. The recommended installation height of the door phone is 140-160cm from the ground.

Product parameters



Product parameters	
Model:	L8-PMG1
Size:	410mm*150mm*50mm
Weight:	2.5KG
Working voltage:	DC12V
LCD screen:	4.3-inch high-definition LCD screen
Screen resolution:	800*480
Video resolution:	720P
Camera Type:	CMOS
Fill light type:	LED white light
Interface type:	RJ45
Support POE:	Yes
Operating system:	OpenRTOS
Communication protocol:	SIP
Password unlock:	Support
Access control IC card:	Support
Access card type:	IC card
Working temperature:	-20℃-50℃
Working humidity:	90%